


L88 Nova/ L88-1 Cortina

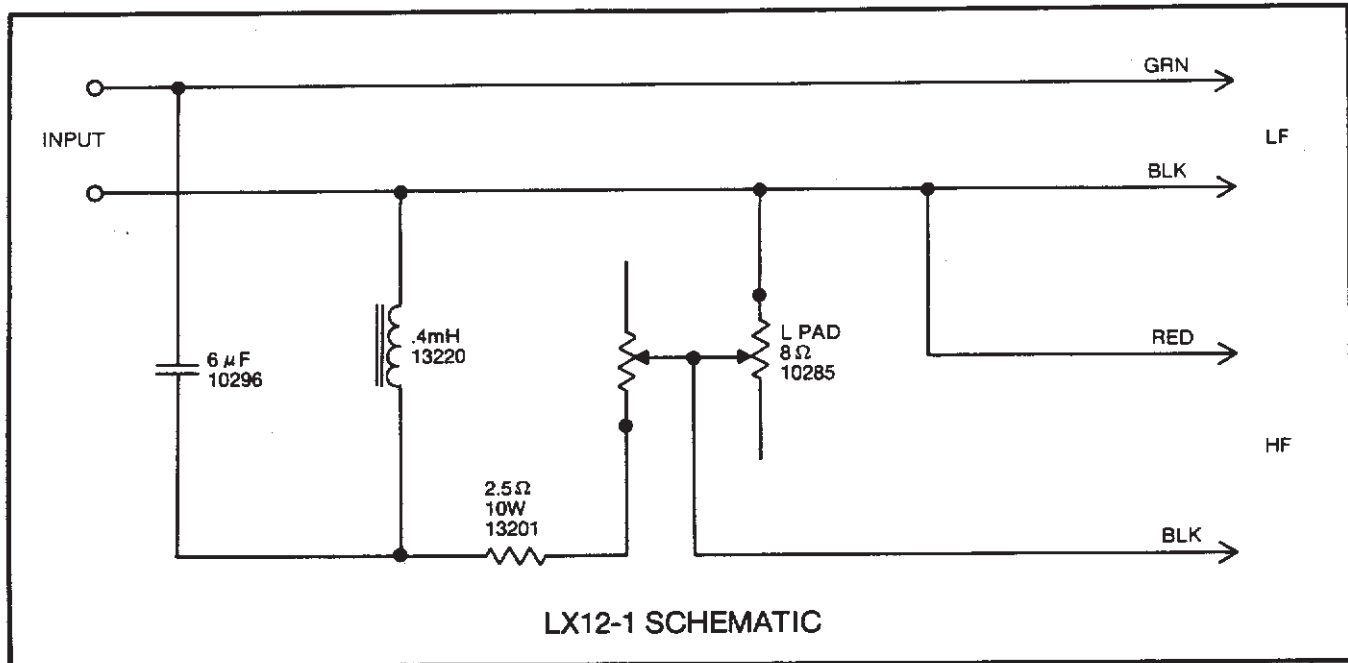

SYSTEM COMPONENTS:

LOW FREQUENCY DRIVER: 123A-1
 Cone Kit: C8R2212
 Nom. Impedance: 8 Ohm
 Dynamic Test Input V: 6
 Sweep Frequency Hz: 20-1200
 D.C. Resistance Ohms: 4.5 minimum
 5.5 maximum
 Gap Gauge: .044"
 Notes: Aquaplas
 If Not Serviceable,
 Replace With: 2213H
 (Reverse Polarity)
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No.
 Slightly different. Replace both units
 in a stereo pair.
 Additional Parts Currently Available*:
 Dome: 31385
 Trim Gasket: 32756

HIGH FREQUENCY DRIVER: LE20-1
 Diaphragm Kit: D8RLE20
 Nom. Impedance: 8 Ohm
 Dynamic Test Input V: 6
 Sweep Frequency Hz: 1000-6000

HIGH FREQUENCY DRIVER (Cont'd)

D.C. Resistance Ohms: 3.7 minimum
 4.2 maximum
 Gap Gauge: .029"
 Notes: Test With Network
 If Not Serviceable,
 Replace With: 035TiA
 Visual Change: Yes
 Baffle Modification: No
 Exact Acoustic Replacement: No. Use as a
 last resort. Replace both units in a stereo pair.
 Additional Parts Currently Available*:
 Trim Ring: 21600

SYSTEM SPECIFICATIONS:

Nominal Impedance: 8 Ohm
 Power Capacity: 50 Watts
 Continuous Program
 Crossover Frequency: 2000 Hz
 Sensitivity: 76dB (1 Watt @ 15 Feet)
 Enclosure Dim: 14" x 23-1/2" x 11-3/4" D
 36cm x 60cm x 30cm
 Shipping Weight: 47 lbs. - 21 kg.
 Additional Parts Currently Available*:
 Grill: G88-Cloth
 Binding Posts: Red: 10243
 Black: 10244

*Other parts may also be available. Check with JBL for details.