

SPECIFICATIONS

SP5

Frequency Response
45 – 20kHz (–10dB)
Recommended Maximum Amplifier Power †
60 watts
Impedance
8 ohms nominal
Sensitivity
87dB (2.83V/1m)
Crossover Frequency
3,000Hz
Woofer
5-1/4" titanium-laminate cone
w/rubber surround
Tweeter
1" titanium-laminate dome,
w/Elliptical Oblate Spheroidal™
(EOS) waveguide, and swivel
mount
Plate Size (W x H)
7-1/2" x 10" (191mm x 254mm)
Mounting Cutout Size (W x H)
6-1/8" x 8-11/16" (156mm x 221mm)
Mounting Depth
3-3/4" (95mm)

SP6

Frequency Response
38 – 20kHz (–10dB)
Recommended Maximum Amplifier Power †
80 watts
Impedance
8 ohms nominal
Sensitivity
88dB (2.83V/1m)
Crossover Frequency
2,000Hz
Woofer
6-1/2" titanium-laminate cone
w/rubber surround
Tweeter
1" titanium-laminate dome,
w/Elliptical Oblate Spheroidal™
(EOS) waveguide, and swivel
mount
Plate Size (W x H)
8-1/2" x 11" (216mm x 297mm)
Mounting Cutout Size (W x H)
7-1/8" x 9-11/16" (181mm x 246mm)
Mounting Depth
3-7/8" (98mm)

SP6C

Frequency Response
40 – 20kHz (–10dB)
Recommended Maximum Amplifier Power †
80 watts
Impedance
8 ohms nominal
Sensitivity
88dB (2.83V/1m)
Crossover Frequency
3,000Hz
Woofer
6-1/2" titanium-laminate cone
w/rubber surround
Tweeter
1" titanium-laminate dome,
w/Elliptical Oblate Spheroidal™
(EOS) waveguide, and swivel
mount
Plate Size (Diameter)
9-3/16" (233mm)
Mounting Cutout Size (Diameter)
7-7/8" (200mm)
Mounting Depth
4-1/4" (108mm)

Occasional refinements may be made to existing products without notice but will always meet or exceed original specifications unless otherwise stated.

† The maximum recommended amplifier power rating will ensure proper system headroom to allow for occasional peaks. We do not recommend sustained operation at these maximum power levels.

* Dolby and Pro Logic are trademarks of Dolby Laboratories.

DTS is a registered trademark of Digital Theater Systems, Inc.

Declaration of Conformity



We, Harman Consumer International
2, route de Tours
72500 Chateau-du-Loir
FRANCE

declare in own responsibility, that the products described in this owner's manual are in compliance with technical standards:

EN 50081-1:1992
EN 50082-1:1992

Steen Michaelsen
Harman Consumer International
Chateau-du-Loir, FRANCE. 9/00

OWNER'S GUIDE

PRODUCT LINE:

SoundPoint™ Series

MODELS:

SP5, SP6 and SP6C

DESIGN GOAL: Combine the superior performance of traditional JBL loudspeakers with the convenience of in-wall installation.

TWEETER TYPE: Titanium-laminate-dome with EOS waveguide, and swivel mount

WOOFER TYPE: Titanium-laminate cone with rubber surround

CROSSOVER NETWORK: Straight-Line Signal Path™ (SSP)

PROFESSIONAL REFERENCE: Studio Monitor

**PRO SOUND
COMES HOME™**

JBL Consumer Products
250 Crossways Park Drive, Woodbury, NY 11797
8500 Balboa Boulevard, Northridge, CA 91329
800-336-4JBL (4525) (USA only)
www.jbl.com




NOTE: For new-construction applications, be sure to purchase the correct rough-in frame kit.

©2000 JBL, Incorporated.

JBL is a registered trademark of JBL, Incorporated.

Part No. 170-0021

H A Harman International Company

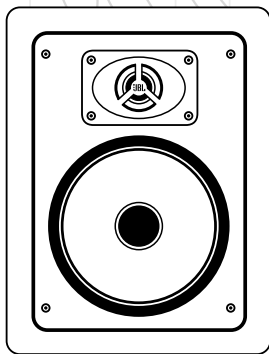

OWNER'S GUIDE

PRODUCT LINE:

SoundPoint™ Series

MODELS: **SP5, SP6 and SP6C**

DESIGN GOAL: Combine the superior performance of traditional JBL loudspeakers with the convenience of in-wall installation.

TWEETER TYPE: Titanium-laminate dome with EOS waveguide, and swivel mount

WOOFER TYPE: Titanium-laminate cone with rubber surround

CROSSOVER NETWORK: Straight-Line Signal Path™ (SSP)

PROFESSIONAL REFERENCE: Studio Monitor

JBL

THANK YOU FOR CHOOSING JBL

For more than 50 years, JBL has been involved in every aspect of music and film recording and reproduction, from live performances to monitoring the recordings you play in your home, car or office.


We're confident that the JBL loudspeakers you have chosen will provide every note of enjoyment that you expected – and that when you think about purchasing additional audio equipment for your home, car or office, you will once again choose JBL.

Please take a moment to complete the enclosed profile card. It enables us to keep you posted on our latest advancements, and helps us to better understand our customers and build products that meet their needs and expectations.


JBL Consumer Products

INCLUDED

SP5, SP6

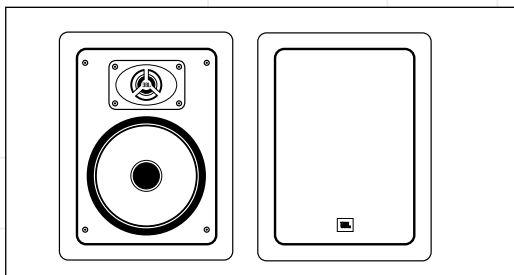


One pair of speakers with grille.




Template/paint shield
(punch out at perforation).

SP6C

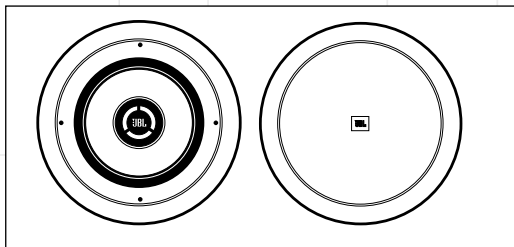



One pair of speakers with grille.





Template/paint shield
(punch out at perforation).

SPEAKER PLACEMENT


Front Speakers



Models SP5, SP6 as Rear Speakers



Model SP6C in Ceiling




Proper placement of the speakers is an important step in obtaining the most realistic soundstage possible. These recommendations are for the optimum placement of the loudspeakers. Use these placement recommendations as a guide. Slight variations will not diminish your listening pleasure. The front speakers should be placed the same distance from each other as they are from the listening position. They should be placed at about the same height from the floor as the listeners' ears will be.


In a home-theater configuration, the two surround speakers should be placed slightly behind the listening position and, ideally, should face each other and be at a level higher than the listeners' ears. If that is not possible, they may be placed in a wall behind the listening position, facing forward. The surround speakers should not call attention to themselves. They should provide a diffuse, ambient sound accompanying the main program material heard in the front speakers.

SPEAKER CONNECTIONS

Connection Tips



The wires for both speakers should be the same length. If one speaker is placed closer to the amplifier than the other, hide the excess wire behind the wall.

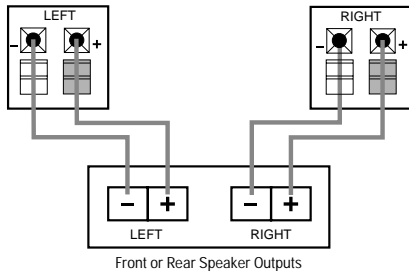

Speakers and electronics terminals have corresponding (+) and (-) terminals. Most manufacturers of speakers and electronics, including JBL, use red to denote the (+) terminal and black for the (-) terminal. It is important to connect both speakers identically: (+) on the speaker to (+) on the amplifier and (-) on the speaker to (-) on the amplifier. Wiring "out of phase" results in thin sound, weak bass and a poor stereo image. With the advent of multi-channel surround-sound systems, connecting all of the speakers in your system with the correct polarity remains equally important in order to preserve the proper ambience and directionality of the program material.

Wire Length
Up to 20 ft.
Up to 30 ft.
Greater than 30 ft.

Recommended Size
16 gauge
12 gauge
10 gauge

INSTALLATION

The SoundPoint™ Series in-wall speakers were designed to be easily installed. However, if you are unsure of your ability to properly install these loudspeakers, please contact your dealer or a qualified installer.

Tools Needed




Pencil




Phillips #2 screwdriver



Measuring tape



Utility knife




Carpenter's level




Awl

EXISTING CONSTRUCTION


SP5, SP6




Remove the grille from the speaker frame.




Determine the correct speaker location.




NOTE: Always allow at least one-half inch between a wall stud and the speaker cutout or the locking tabs will not be able to swivel into place.




Cut the dry wall.




Connect the speaker wires to the speaker.



Place the frame assembly in the wall.




Screw down each of the four Phillips head screws. The locking tabs will swivel into place and secure the unit to the rear surface of the drywall.




Replace the metal grille.

EXISTING CONSTRUCTION


SP6C




Remove the grille from the speaker frame.




Determine the correct speaker location. **Note:** Always allow at least one-half inch between a wall stud and the speaker cutout or the locking tabs will not be able to swivel into place.




Cut the drywall.




Connect the speaker wires to the speaker.



Place the frame assembly in the wall.



Screw down each of the three Phillips head screws. The locking tabs will swivel into place and secure the unit to the rear surface of the drywall.



Replace the metal grille.

NEW CONSTRUCTION

You will need to purchase the correct rough-in frame kit for your model:

Speaker Model	Rough-in Frame Kit
SP5	RIF5
SP6	RIF6
SP6C	RIF6C

Detailed installation instructions are supplied with the rough-in kit.

PAINTING THE SPEAKER FRAME AND GRILLE

SoundPoint™ Series loudspeakers can be painted to match any decor. If you wish to change their color, the satin finish on the grille and frame will function as a primer coat. Before painting, install the paint shield (in the assembly kit) securely into the recess in the baffle. This will

protect the speaker components and baffle from paint residue. Use a high-quality spray paint, and apply a thin coat of color. **Be certain the grille perforations remain free of paint. Filling them with paint will diminish the sound quality.**

Note: Gently remove the acoustical foam blanket from the grille before painting. Reattach the blanket after the paint has dried.

TROUBLESHOOTING

If there is no sound from any of the speakers:

- Check that receiver/amplifier is on and a source is playing.
- Check all wires and connections between receiver/amplifier and speakers. Make sure all wires are connected. Make sure none of the speaker wires are frayed, cut or punctured.
- Review proper operation of your receiver/amplifier.

If there is no sound coming from one speaker:

- Check the “Balance” control on your receiver/amplifier.
- Check all wires and connections between receiver/amplifier and speakers. Make sure all wires are connected. Make sure

none of the speaker wires are frayed, cut or punctured.

If there is low (or no) bass output:

- Make sure the connections to the left and right “Speaker Inputs” have the correct polarity (+ and –).
- Consider adding a powered subwoofer to your system.
- In Dolby* Digital or DTS® modes, make sure your receiver/processor is correctly configured. When using a subwoofer, make sure the subwoofer output of the receiver/processor has been enabled. If no subwoofer is being used, make sure the left and right front and rear speakers have been configured as “LARGE.” See your

receiver/processor’s owner’s manual for further information on correct speaker configuration in Dolby Digital, DTS and other surround-sound modes.

If the system plays at low volumes but shuts off as volume is increased:

- Check all wires and connections between receiver/amplifier and speakers. Make sure all wires are connected. Make sure none of the speaker wires are frayed, cut or punctured.
- If more than one pair of main speakers is being used, check the minimum-impedance requirements of your receiver/amplifier.