

TOTAL SOLUTIONS™

TSS 3-IN-1

 **Infinity**®

TECHNOLOGY • PERFORMANCE • DESIGN

Why do you need three separate speakers to get great TV sound?

You don't.



## TSS 3-IN-1. THREE LOUSPEAKERS, ONE ENCLOSURE.

### INNOVATION THAT'S PURE INFINITY

For almost 40 years, Infinity has been moving the science of sound forward with groundbreaking new technologies, revolutionary new materials and advanced manufacturing techniques, continually raising performance standards for the industry. With the TSS 3-in-1 loudspeaker system, Infinity demonstrates it can see beyond industry conventions to find a better, simpler way of doing things.

The TSS 3-in-1 will instantly and dramatically upgrade the sound of any television connected to an A/V receiver. As part of a complete home theater system, it will deliver the left, right and center channels with all the finesse of the three separate speakers it replaces, delivering crisp dialogue and spacious imaging.

Designed to match the size and look of popular flat-panel plasma and LCD displays, the TSS 3-in-1 is stylish new proof of Infinity's genius for innovation.


### TECHNOLOGY THAT SETS THE STANDARD

Nine transducers with MMD<sup>®</sup> driver technology for improved responsiveness. A rigid extruded-aluminum enclosure that reduces unwanted resonances. And room-friendly acoustical waveguides for more



accurate high-frequency response across a wider listening area. The TSS 3-in-1 packs some of Infinity's most advanced technologies and materials into one elegant, deceptively simple-looking package.



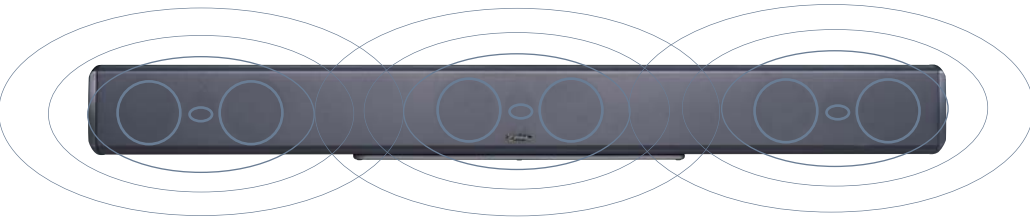

#### **SIMPLE, ELEGANT, FLEXIBLE**

- Extruded- and brushed- aluminum enclosure
- MMD drivers
- Three 2-way speakers with dual 3-1/2" woofers and a 3/4" tweeter
- Magnetically shielded
- Includes wall bracket
- Includes base for shelf placement
- Available in platinum or charcoal



#### **THE OPTIONS ARE STANDARD**

The TSS 3-in-1 includes both wall-mounting hardware and a shelf cradle. After all, only you know which is right for you.

#### **THE BIGGER PICTURE**

The TSS 3-in-1 doesn't just match today's video displays. It also matches other speakers in the TSS Series. Build the 5- or 7-channel home theater system of your dreams with a combination of TSS-SAT750 or TSS-SAT1100 surrounds, and a choice of impressive powered subwoofers. Your home entertainment experience will never be the same again.



Add TSS-SAT750's or TSS-SAT100's and one of Infinity's impressive subwoofers to create a 5.1- or even a 7.1-channel system.

## TSS 3-IN-1 COMPONENT SPECIFICATIONS.



Frequency Range ( $\pm 3\text{dB}$ )	120Hz – 20,000Hz
Recommended Amplifier Power Range	10 – 125 watts
Sensitivity (2.83V @ 1 meter)	89dB
Nominal Impedance	8 ohms
Crossover Frequency	3,500Hz; 24dB/octave
Midrange Drivers	Dual 3-1/2" (87mm) MMD <sup>®</sup> , magnetically shielded
High-Frequency Driver	3/4" (19mm) MMD, magnetically shielded
Dimensions (H x W x D)	4-1/8" x 40-1/8" x 4-3/8" (105mm x 1019mm x 111mm)
Weight	15.25 lb (6.9kg)

### 3-in-1 (each channel)

Frequency Range ( $\pm 3\text{dB}$ )	120Hz – 20,000Hz
Recommended Amplifier Power Range	10 – 125 watts
Sensitivity (2.83V @ 1 meter)	89dB
Nominal Impedance	8 ohms
Crossover Frequency	3,500Hz; 24dB/octave
Midrange Drivers	Dual 3-1/2" (87mm) MMD <sup>®</sup> , magnetically shielded
High-Frequency Driver	3/4" (19mm) MMD, magnetically shielded
Dimensions (H x W x D)	4-1/8" x 40-1/8" x 4-3/8" (105mm x 1019mm x 111mm)
Weight	15.25 lb (6.9kg)



### Surround Speaker Options

	TSS750 Satellites	TSS1100 Satellites
Frequency Range ( $\pm 3\text{dB}$ )	120Hz – 20,000Hz	120Hz – 20,000Hz
Recommended Amplifier Power Range	10 – 100 watts	10 – 125 watts
Sensitivity (2.83V @ 1 meter)	88dB	89dB
Nominal Impedance	8 ohms	8 ohms
Crossover Frequency	3500Hz; 24dB/octave	3500Hz; 24dB/octave
Midrange Driver(s)	3-1/2" (87mm) MMD <sup>®</sup> , magnetically shielded	Dual 3-1/2" (87mm) MMD <sup>®</sup> , magnetically shielded
High-Frequency Driver	3/4" (19mm) MMD, magnetically shielded	3/4" (19mm) MMD, magnetically shielded
Dimensions (H x W x D)	6" x 4-1/8" x 4-3/8" (152mm x 105mm x 111mm)	9-1/4" x 4-1/8" x 4-3/8" (235mm x 105mm x 111mm)
Weight	2.8 lb (1.3kg)	4.5 lb (2.0kg)



### Powered Subwoofers

	TSS-SUB750	TSS-SUB4000
Frequency Range ( $\pm 3\text{dB}$ )	34Hz – 150Hz	28Hz – 150Hz
Amplifier Output	150 watts RMS	400 watts RMS
Low-Frequency Driver	10" (250mm)	12" (300mm), MMD <sup>®</sup>
Crossover Frequency	50Hz – 150Hz, 24dB/octave, continuously variable	150Hz, 12dB/octave
Dimensions (H x W x D)	16-3/4" x 10-3/4" x 15-3/4" (425mm x 273mm x 400mm)	17-1/2" x 17-1/4" x 11-1/8" (445mm x 438mm x 283mm)
Weight	33 lb (15.0kg)	48 lb (21.8kg)

### OPTIONAL ACCESSORY

TS-STAND	Floor Stand for TSS-SAT750 and TSS-SAT1100
----------	--

See your authorized Infinity dealer for details.