

S P E C I F I C A T I O N S

Kappa 9.2i Series II

Driver Complement: (2) 30 cm IMG™ Woofers, 16.5 cm Mid-Bass Coupler, 7.5 cm Polydome Midrange, EMIT-R™ Tweeter
Frequency Response: 27 Hz to 35 kHz +/- 2 dB
Crossover Frequencies: 180 Hz, 750 Hz and 3.5 kHz
Recommended for use with amplifiers rated between 60 and 400 watts, RMS

Sensitivity: 89 dB at 2.8 volts, 1 metre
Nominal Impedance: 4 Ohms (1.6 ohms with extended bass response switch on)
Cabinet Finish: Honey Oak Veneer, Black Oak Veneer
Dimensions: Height: 149.4 cm, Width: 45.7 cm, Depth: 35.6 cm (with grille installed)
Shipping Weight: 50.4 kg

Kappa 8.2i Series II

Driver Complement: 30 cm IMG™ Woofer, 16.5 cm Mid-Bass Coupler, 7.5 cm Polydome Midrange, EMIT-R™ Tweeter
Frequency Response: 32 Hz to 35 kHz +/- 2 dB
Crossover Frequencies: 180 Hz, 700 Hz and 4.7 kHz
Recommended for use with amplifiers rated between 40 and 300 watts, RMS

Sensitivity: 89 dB at 2.8 volts, 1 metre
Nominal Impedance: 6 Ohms
Cabinet Finish: Honey Oak Veneer, Black Oak Veneer
Dimensions: Height: 122.6 cm, Width: 41.9 cm, Depth: 30.3 cm (with grille installed)
Shipping Weight: 32.5 kg

Kappa 7.2i Series II

Driver Complement: 25.4 cm IMG™ Woofer, 7.5 cm Polydome Midrange, EMIT-R™ Tweeter
Frequency Response: 39 Hz to 35 kHz +/- 2 dB
Crossover Frequencies: 500 Hz and 11.5 kHz
Recommended for use with amplifiers rated between 30 and 250 watts, RMS

Sensitivity: 89 dB at 2.8 volts, 1 metre
Nominal Impedance: 6 Ohms
Cabinet Finish: Honey Oak Veneer, Black Oak Veneer
Dimensions: Height: 110.2 cm, Width: 36.7 cm, Depth: 26 cm (with grille installed)
Shipping Weight: 23.5 kg

Kappa 6.2i Series II


Driver Complement: 20 cm IMG™ Woofer, 7.5 cm Polydome Midrange, EMIT-R™ Tweeter
Frequency Response: 45 Hz to 35 kHz +/- 2 dB
Crossover Frequencies: 500 Hz and 4.5 kHz
Recommended for use with amplifiers rated between 30 and 200 watts, RMS

Sensitivity: 89 dB at 2.8 volts, 1 metre
Nominal Impedance: 6 Ohms
Cabinet Finish: Honey Oak Veneer, Black Oak Veneer
Dimensions: Height: 96.5 cm, Width: 31 cm, Depth: 23.4 cm (with grille installed)
Shipping Weight: 17.9 kg

Kappa Video Series II

Driver Complement: (2) 13 cm IMG™ Woofer with magnetic shielding, EMIT-R™ Tweeter with magnetic shielding
Frequency Response: 90 Hz to 35 kHz +/- 2 dB
Crossover Frequencies: 4 kHz
Recommended for use with amplifiers rated between 25 and 150 watts, RMS

Sensitivity: 89 dB at 2.8 volts, 1 metre
Nominal Impedance: 6 Ohms
Cabinet Finish: Honey and Black Oak Veneer with solid oak end panels
Dimensions: Height: 52.7 cm, Width: 20.6 cm, Depth: 16 cm
Shipping Weight: 6.3 kg

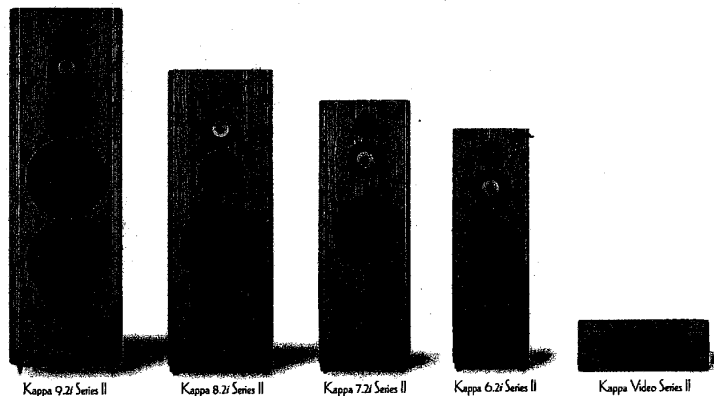

Infinity

© 1995 Infinity Systems, Inc., 20630 Nordhoff Street, Chatsworth, CA 91311 USA Fax: (818) 709-9486, Tel: (818) 407-0228

Infinity constantly strives to update and improve existing products, as well as create new ones. Therefore, the specifications and construction details on this Infinity publication are subject to change without notice.

Part No 939...7569

H A Harman International Company