



FS-ITM/IL FLOOR STAND


Installation Guide

Floor Stands for Intermezzo™ 2.6 or Interlude™ IL10 Speakers

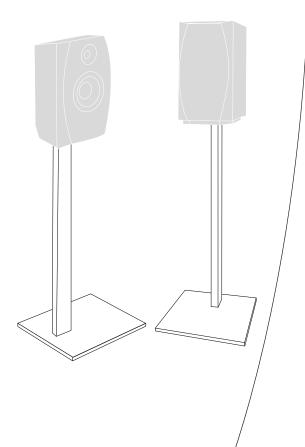


Included — This Infinity speaker stand is designed to be used with the Intermezzo 2.6 or Interlude IL10 speaker. Below are the pieces that are included for this speaker stand.




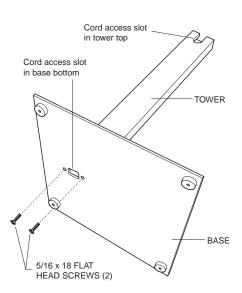


(STEP 1) Screw Tower to Base with (2) 5/16 x 18 Round Head Screws. Note that it is important which direction the slot in the Tower Top faces depending on the application desired. See Steps 2A and 2B for possible applications.

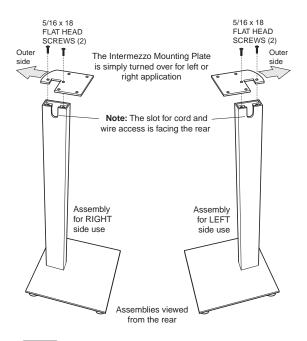


STEP 2A Intermezzo 2.6 – When used with Intermezzo 2.6 speakers, the rounded edge of the Mounting Plate should face the outer side of the stand assembly; the same side as the decorative side panel on the front of each Intermezzo speaker.




STEP 2B Interlude IL10 – When used with Interlude IL10 speakers, the assembly process is the same, regardless of LEFT or RIGHT placement.

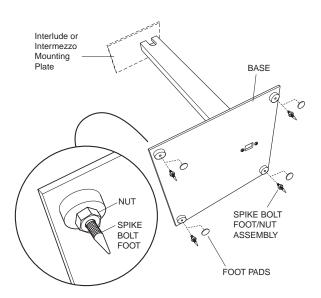


STEP 3 The floor stand includes both spikes and felt pads. For installations on a carpet, we recommend the use of the spikes as this will provide maximum stability and acoustic isolation. For applications where there is a floor surface that may be damaged by the spikes, felt pads are also provided. The Spike Feet are comprised of a Spike Bolt and a Nut that tightens to lock the Spike Bolt in place.

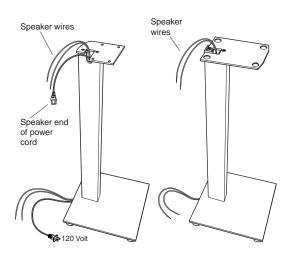

STEP 4 Insert speaker end of power cord in cord access hole in base and feed it up and out through the top. Run the speaker wires in the same manner.

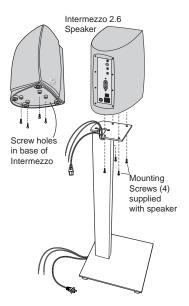

STEP 5A Intermezzo 2.6 – Place the Intermezzo speaker on its mounting plate and secure with (4) screws (provided with the speaker).



STEP 5B Interlude IL10 – Place the Interlude speaker on its mounting plate and align its (4) Foot Pads with the Foot Pad recesses.

