

HK 3390

2 x 80W stereo receiver

harman/kardon®
Designed to Entertain.™

Specifications



■ The Harman Kardon® HK 3390

was born to make beautiful music, and, like all specialists, it's very good at what it does. It features high-current, ultrawide-bandwidth amplification, a signature Harman Kardon® technology that delivers all the subtlety of an original musical performance, whether reproduced from vinyl or your MP3 player of choice. But even specialists enjoy a change of pace from time to time. So the HK 3390 also features four high-quality composite-video inputs as well as convenient front-panel inputs for video games and portable audio players.

■ Highlights

- Phono input
- Ultrawide bandwidth
- A/B speaker selection
- Composite-video inputs
- Headphone output
- Tape monitor loop
- Two triggered subwoofer outputs
- High current capability

■ Key Specifications


- Audio section – continuous average power (FTC), (stereo mode): 80 watts per channel into 8 ohms @ 20Hz – 20kHz, <0.07% THD, both channels driven; high instantaneous-current capability (HCC): ±42 amps
- Tuner – usable sensitivity: IHF 1.3µV/13.2dB; THD at 1kHz with 100% modulation, (mono): 0.2%; (stereo): 0.3%; FM adjacent-channel selectivity: ±400kHz, 70dB; ultimate (maximum) S/N ratio (measured at 1mV RF input level), (mono): 70dB; (stereo): 68dB
- Dimensions (H x W x D) and weight: 165mm x 440mm x 382mm, 9.5kg

Depth measurement includes table stand, knobs, buttons and terminal connections, unless stated otherwise; height measurement includes feet and chassis, unless stated otherwise.

HK 3390

2 x 80W stereo receiver

harman/kardon®
Designed to Entertain.™

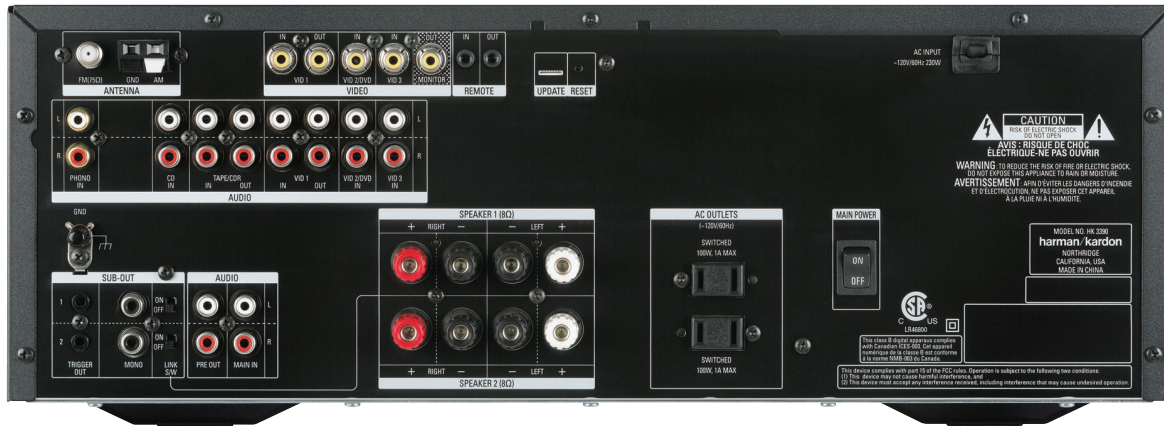

■ Features

Power

- 80W x 2 into 8 ohms, 20Hz – 20kHz, at <0.07% THD, with all channels driven simultaneously
- High-current (± 42 amps), ultrawide-bandwidth (10Hz – 110kHz) amplifier design

Connectivity

- Dual subwoofer output with trigger for direct connection to powered subwoofers
- Four A/V inputs with composite video, plus three audio-only inputs
- One composite-video monitor output
- Stereo preamp outputs for the use of an external power amplifier
- Convenient front-panel audio/video input for use with video games or portable audio players
- One high-quality phono input for connecting to record players with an MM cartridge
- Two analog-recording outputs (tape and video)
- IR remote-extension jacks to control the amplifier when it is placed in a cabinet

Ease of Use

- High current capability for the instantaneous current necessary to drive and control nearly any loudspeaker system precisely
- Ultrawide-bandwidth amplifier design for improved transient accuracy and phase linearity
- FM stereo/FM/AM tuner with RDS, auto preset, direct-access tuning and 30 presets
- Two-line dot-matrix display for clear readability
- Dimmer to reduce the brightness of the information screen or switch it off completely
- Tape monitor loop for recording
- Remote A/B speaker switching
- Subwoofer trigger for sending switch on/off information to subwoofer
- Two switched AC outlets on the back panel to power accessory devices
- IR remote extension jacks to control the amplifier when it is placed in a cabinet
- Harman Kardon system remote to control compatible Harman Kardon CD players and tuners

H Harman International

Harman Consumer, Inc.
8500 Balboa Boulevard, Northridge, CA 91329 USA
www.harmankardon.com

© 2010 Harman International Industries, Incorporated. All rights reserved. Harman Kardon is a trademark of Harman International Industries, Incorporated, registered in the United States and/or other countries. Designed to Entertain is a trademark of Harman International Industries, Incorporated.

Features, specifications and appearance are subject to change without notice.

EAN Code AVR HK 3390/230: 0282925064446